


## Set-up Diagram

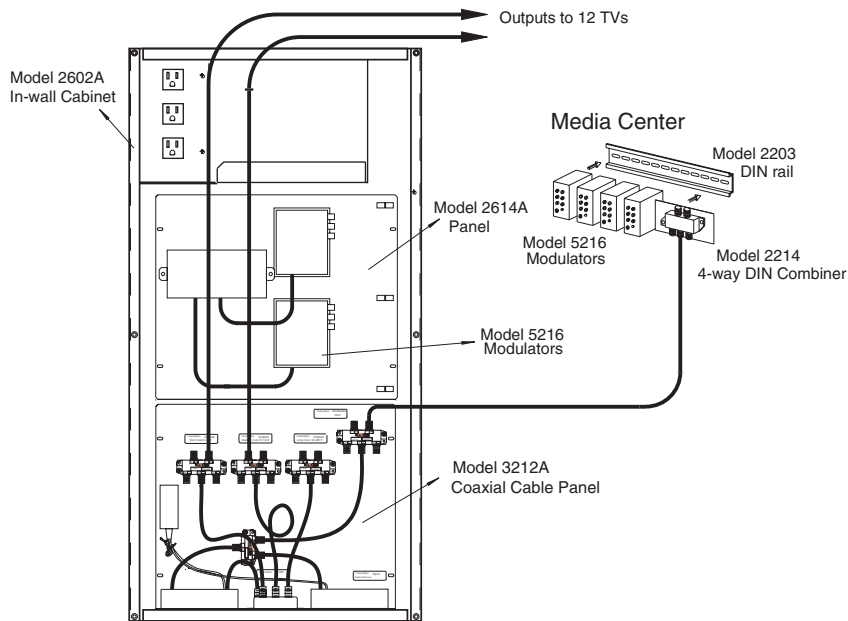

# Channel Plus®

## PERFORMANCE MULTI-ROOM VIDEO

## Model 5216 DIN-mount Modulator Owner's Manual

### Warranty

Multiplex Technology, Inc., warrants this product to be free from defects in materials and workmanship for a period of one year from the date of purchase or MTI will repair or, at its option, replace the defective product. To obtain warranty service, call MTI for a Return Material Authorization (RMA) number and return the product pre-paid accompanied by a copy of the purchase receipt

Attn: Customer Service.


Service. Please put the RMA number on the outside of the carton.

Any implied warranty arising from the sale of the product including implied warranties of merchantability and fitness for purpose are limited to the warranty stated above. MTI shall not be responsible for any loss, damages or expenses, whether direct, consequential, or incidental arising from the use or inability to use this product. Some states do not allow limitations on how long an implied warranty lasts or the exclusion or limitation or incidental or consequential damages, so the above limitations may not apply to you. This warranty gives you specific legal rights, and you may have other rights which vary from state to state.

600-044A


1/16/96

**multiplex®**  
technology, inc.

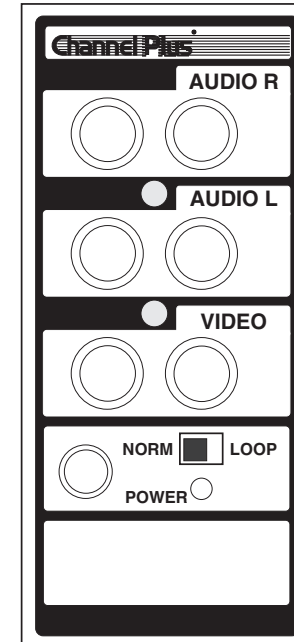



**multiplex®**  
**technology, inc.**

## Model 5216

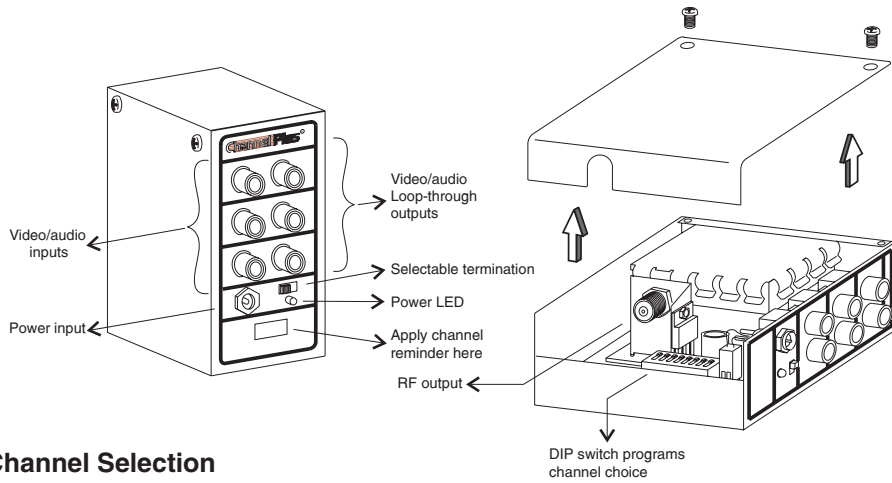


## Channel Selection Guide


### CABLE CHANNELS

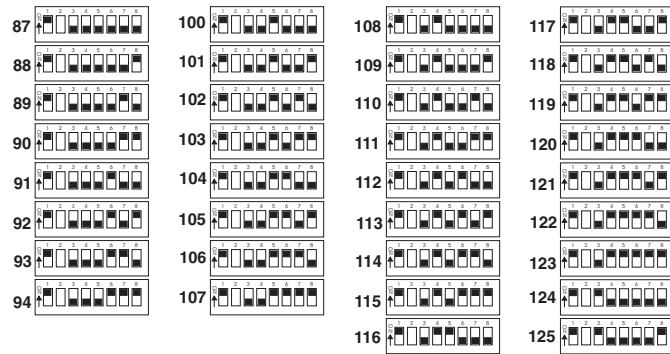

### UHF CHANNELS

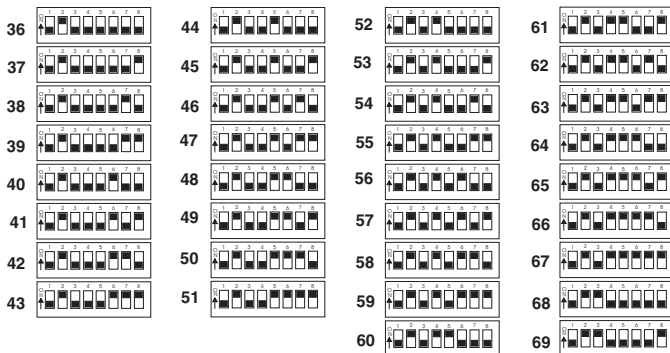

## Mounting Options

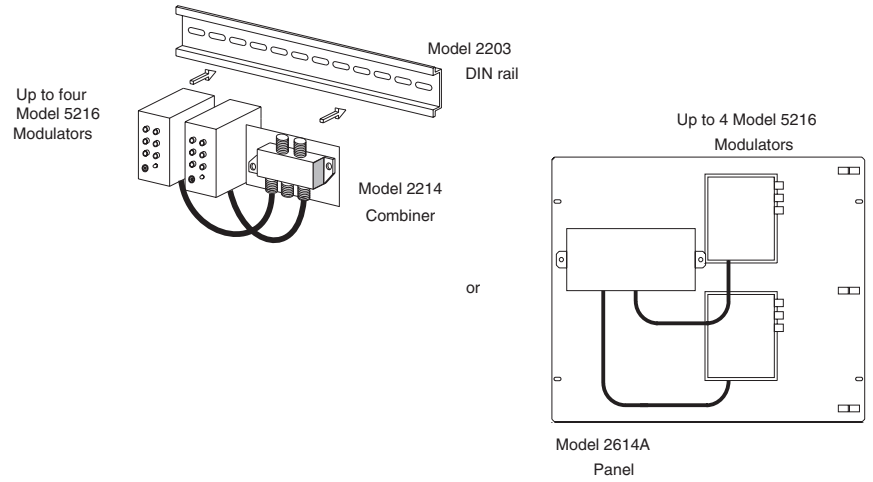

## Specifications

Output	25 dBmV
Input	Video: 1Vp-p @ 75 Ω Format: NTSC
Input connectors	3 RCA (Video+Audio Left+Audio Right)
Loop-thru connectors	3 RCA (Video+Audio Left+Audio Right)
Video Termination	75 Ω or > 1 MΩ in "Loop" position (switch selectable)
Frequency Range	UHF: Channel 36 to 69 CATV: Channel 87 to 125 (excluding 95 to 99)
Frequency Stability	± 5 kHz
Temperature Operating	0° C to 50° C
Storage	-30° C to 50° C
Power Supply	Model 350-067 (included) Input: 120 VAC, 60 Hz Output: 12 VAC, 400 mA
Dimensions	4.2"(H) x 1.5"(W) x 3.1"(D)
Weight	1 lb
Shipping Weight	2 lbs