
FM ANTENNA MODEL D-360



- 1. Install the antenna inside the roof whenever possible.
- 2. Perform as much antenna assembly on the ground as possible.
- 3. Unfold antenna elements and attach mast clamp and U-Bolt assembly.
- 4. Attach intercoupler and lead-in wire to antenna wing nuts.
- 5. Slide U-Bolt assembly up the Pole Mast and tighten Hex Nuts.
- 6. Dress 300 Ohm lead-in wire to the Radio Master Unit.

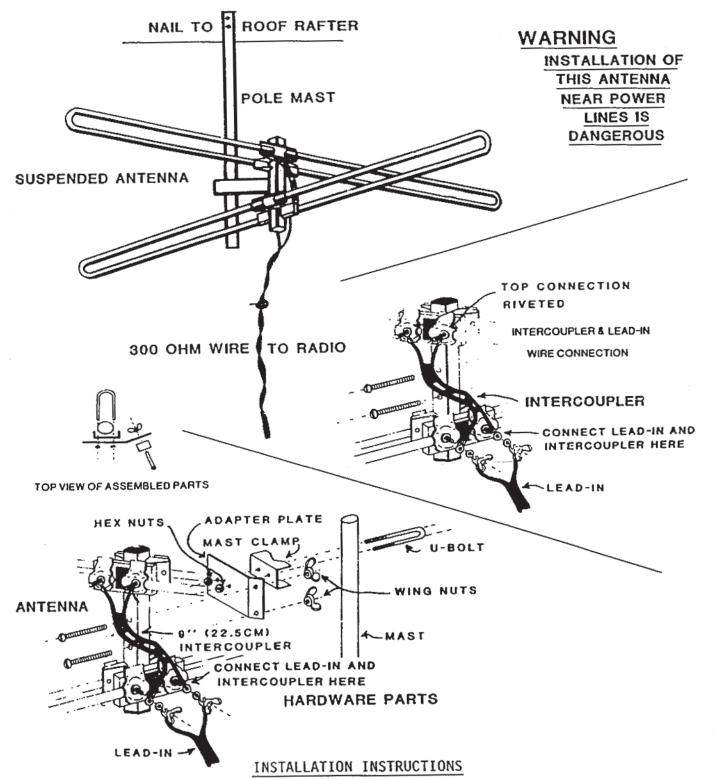