


DXT-601 DXT-604



MINIATURE DIGITAL TRANSMITTERS

Operation Instructions



Linear

(760) 438-7000
USA & Canada (800) 421-1587 & (800) 392-0123
Toll Free FAX (800) 468-1340
www.linearcorp.com

PRODUCT DESCRIPTION

The DXT-601 and DXT-604 are battery powered, portable, miniature transmitters designed for use with Linear's DX Format receivers. Each transmitter can be used in a limitless number of wireless remote control applications. Pressing a button on the transmitter sends a digitally coded wireless signal to its companion receiver.

The digital DX code format features over a million possible codes. The DX transmitters are precoded at the factory to unique codes, so no field coding is required. The four-button transmitter sends variations of its preset code depending on which buttons are pressed. Transmitters can send a signal for up to 10 seconds with each single-button activation.

A transmitter code can be programmed into any receiver channel. Receivers must be programmed to the transmitter code before system testing and operation. DX Format digital receivers are programmed by "Learning" the preset factory code from the transmitter. Refer to the receiver's instructions for details on programming.

Each transmitter is powered from two 3-Volt Type 216 "coin cell" batteries with an expected battery life of up to 5 years. When the transmitter's range decreases, or stops functioning, replace the batteries.

A two-part key-ring is provided for each transmitter.


TRANSMITTER CONFIGURATIONS

DXT-601

The DXT-601 is a one-button, one-code transmitter. Pressing the button sends the transmitter's code to the receiver. Press the button for a minimum of two seconds to insure receiver activation.

DXT-604

The DXT-604 is a four-button, five-code transmitter. Each button sends a unique code. Pressing both top buttons together sends code five. Press button(s) for a minimum of two seconds to insure receiver activation.

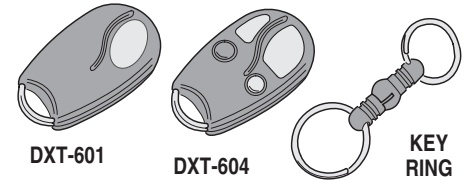


DXT-601

DXT-604

KEY RING

DXT-601 FEATURES

PRESS BUTTON TO SEND A TRANSMISSION



PRESS BUTTON FOR A MINIMUM OF 2 SECONDS

DXT-604 FEATURES

PRESS TO SEND LEFT BUTTON CODE

PRESS BOTH TO SEND DOUBLE BUTTON CODE

PRESS TO SEND BLACK ROUND BUTTON CODE

PRESS TO SEND RIGHT BUTTON CODE

PRESS TO SEND RED ROUND BUTTON CODE

NOTE: BLACK AND RED ROUND BUTTONS WILL NOT FUNCTION WITH THE DVS-1200, DVS-2400, DUAL 824 & PERS-2400


NOTE: PRESS BUTTON FOR A MINIMUM OF 2 SECONDS

BATTERY REPLACEMENT STEP 1


TWIST A COIN IN SLOT TO OPEN TRANSMITTER CASE



REMOVE THE BACK OF THE CASE




REMOVE THE TWO BATTERIES




DISCARD BATTERIES PROPERLY

BATTERY REPLACEMENT STEP 2

SLIDE IN TWO NEW TYPE 216 BATTERIES



BE SURE BOTH PLUS (+) SIDES ARE FACING AWAY FROM THE CIRCUIT BOARD



SNAP CASE TOGETHER

LINEAR LIMITED WARRANTY

This Linear product is warranted against defects in material and workmanship for twelve (12) months. The Warranty Expiration Date is labeled on the product. This warranty extends only to wholesale customers who buy direct from Linear or through Linear's normal distribution channels. Linear does not warrant this product to consumers. Consumers should inquire from their selling dealer as to the nature of the dealer's warranty, if any. There are no obligations or liabilities on the part of Linear LLC for consequential damages arising out of or in connection with use or performance of this product or other indirect damages with respect to loss of property, revenue, or profit, or cost of removal, installation, or reinstallation. All implied warranties, including implied warranties for merchantability and implied warranties for fitness, are valid only until Warranty Expiration Date as labeled on the product. This Linear LLC Warranty is in lieu of all other warranties express or implied. All products returned for warranty service require a Return Product Authorization Number (RPA#). Contact Linear Technical Services at 1-800-421-1587 for an RPA# and other important details

IMPORTANT

- Linear radio controls provide a reliable communications link and fill an important need in portable wireless signaling. However, there are some limitations which must be observed.
- For U.S. installations only: The radios are required to comply with FCC Rules and Regulations as Part 15 devices. As such, they have limited transmitter power and therefore limited range.
- A receiver cannot respond to more than one transmitted signal at a time and may be blocked by radio signals that occur on or near their operating frequencies, regardless of code settings.
- Changes or modifications to the device may void FCC compliance.
- Infrequently used radio links should be tested regularly to protect against undetected interference or fault.
- A general knowledge of radio and its vagaries should be gained prior to acting as a wholesale distributor or dealer, and these facts should be communicated to the ultimate users.