





PERFORMANCE MULTI-ROOM VIDEO

**Model 5214  
DIN-mount Modulator  
Owner's Manual**

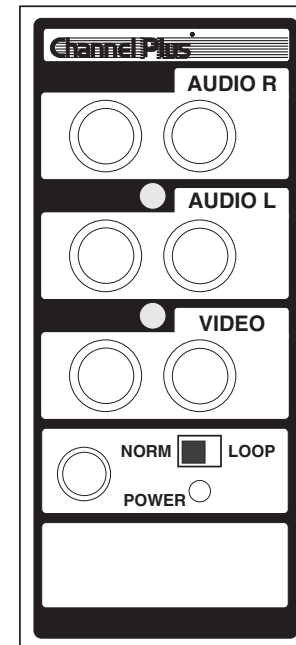


# Model 5214

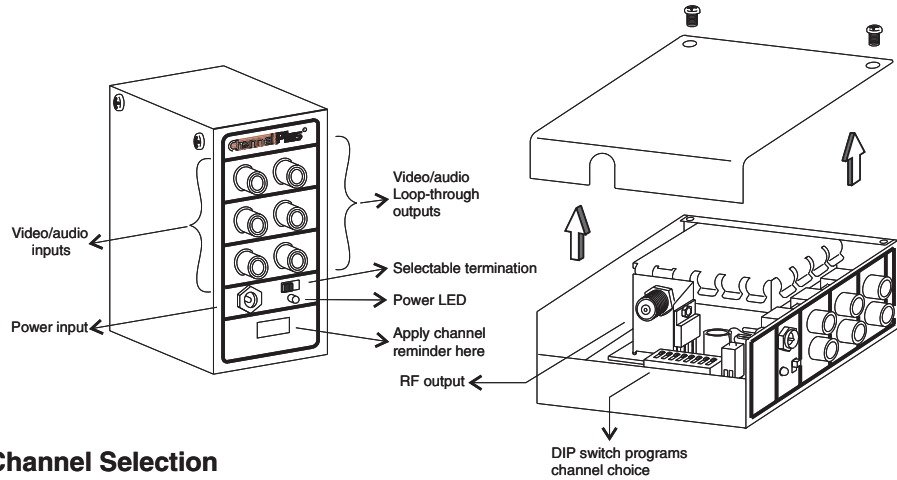


## Channel Selection Guide


### CABLE CHANNELS

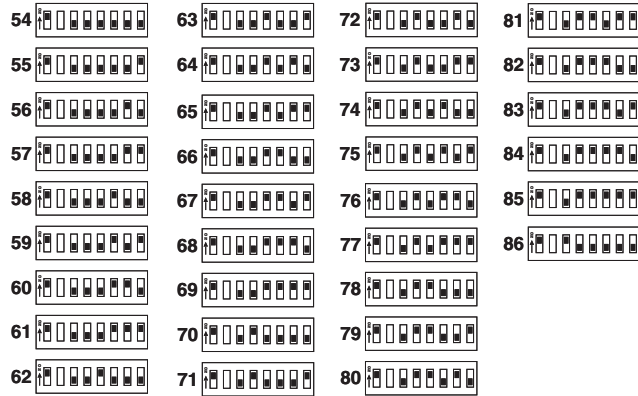

### UHF CHANNELS

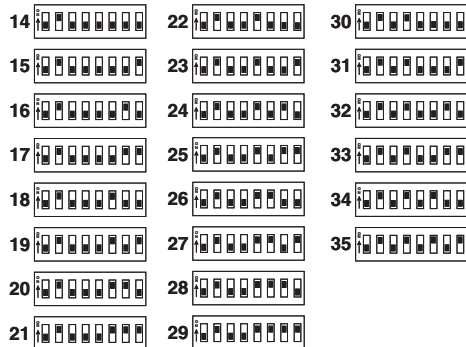


## Mounting Options

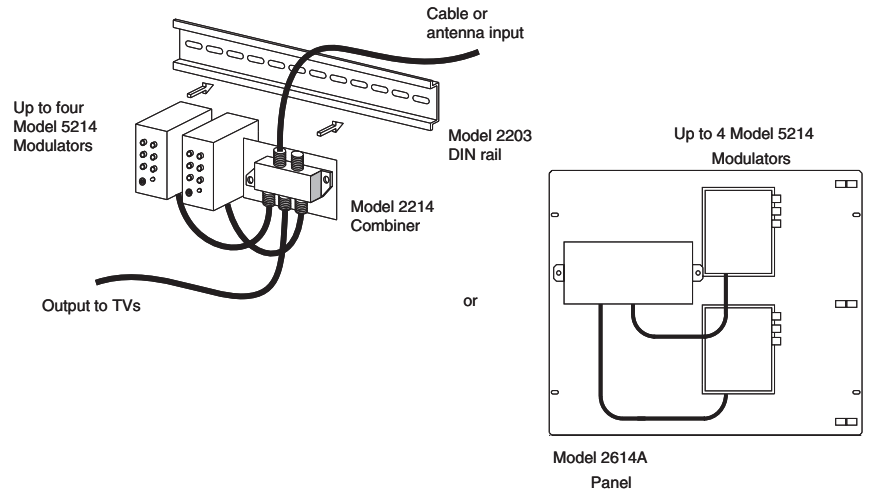

## Specifications

Output Input	25 dBmV Video: 1Vp-p @ 75Ω Format: NTSC
Input connectors	3 RCA (Video+Audio Left+Audio Right)
Loop-thru connectors	3 RCA (Video+Audio Left+Audio Right)
Video Termination	75 Ω or > 1 MΩ in "Loop" position (switch selectable)
Frequency Range	UHF Channel 14 to 35 CATV Channel 54 to 86
Frequency Stability	± 5 kHz
Temperature Operating Storage	0° C to 50° C -30° C to 50° C
Power Supply	Model 350-067 (included) Input: 120 VAC, 60 Hz Output: 12 VAC, 400 mA
Dimensions	4.2"(H) x 1.5"(W) x 3.1"(D)
Weight	1 lb
Shipping Weight	2 lbs

## Set-up Diagram

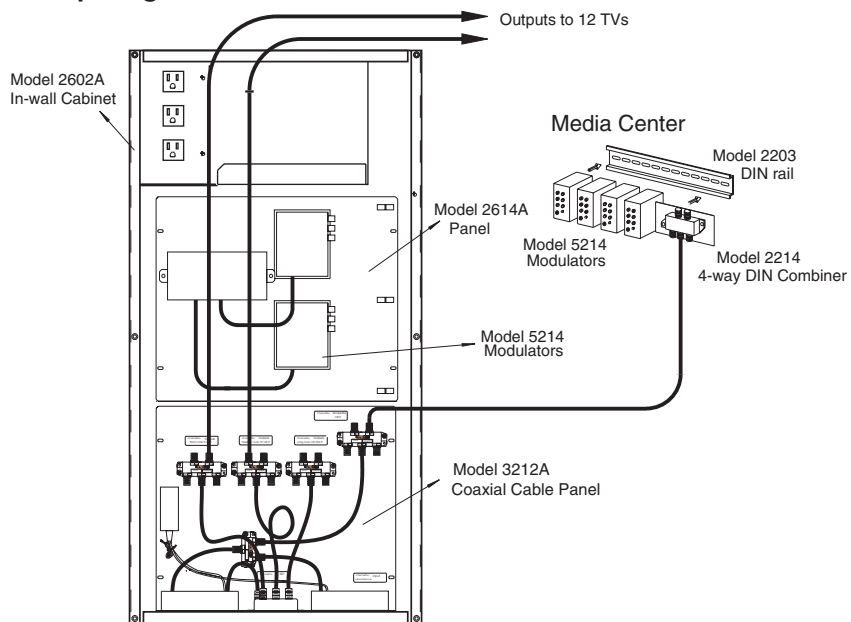

## Warranty

Multiplex Technology, Inc. warrants this product to be free from defects in materials and workmanship for a period of one year from the date of purchase or MTI will repair, or at its option, replace the defective product. To obtain warranty service, call MTI for a return material authorization (RMA) number and return the product prepaid

Attention: Customer Service. Please put the RMA number on the outside of the carton.

Any implied warranty arising from the sale of the product including implied warranties of merchantability and fitness for purpose are limited to the warranty stated above. MTI shall not be responsible for losses or damages or expenses, whether direct, consequential or incidental arising from the use of or the inability to use this product. Some states do not allow limitations on how long the implied warranty lasts or the exclusion or limitation or incidental or consequential damages, so the above limitations and exclusions may not apply to you. This warranty gives you specific legal rights, and you may have other rights which may vary from state to state.