


## 19-INCH LCD MONITOR

- 1280 x 1024 Resolution
- Bright 300 cd/m<sup>2</sup> Display
- HDMI, VGA Inputs
- 3D Comb Filter with De-Interlace
- 2x Looped BNC Inputs
- Power Adapter Included
- VESA Compliant Hole Pattern

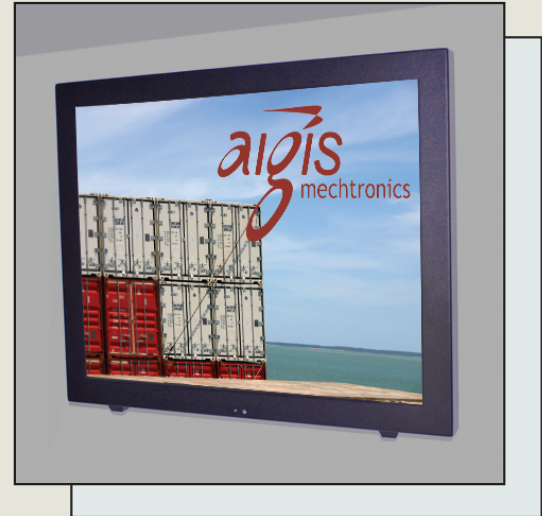

## S P E C I F I C A T I O N S

19-Inch CCTV LCD Monitor		Part Number - SM19M-B
<b>Display</b>	Product ID	SM19M-B
	Screen Size	19"
	Aspect Ratio	4:3
	Resolution	1280 x 1024
	Brightness (cd/m <sup>2</sup> )	300
	Response Time	8 ms
	Viewing Angle (H/V)	170° / 170°
	Contrast Ratio	800:1
	Pixel Pitch	0.294 x 0.294mm
<b>Interface</b>	Digital Inputs	HDMI, VGA, S-Video
	Composite Inputs / Outputs (BNC)	2 / 2
<b>Audio</b>	Audio Input	1/8" Phono Jack
	Audio Output(s)	2 x RCA Out (L/R)
<b>Power</b>	Power Consumption	< 48W
<b>Design Features</b>	Features - Signal Filter	3D-Comb, De-Interlace
	Features - PIP - I composite, I digital	Yes
	Wall Mount Hole Pattern	100 x 100 mm, tilt stand included
	Remote	Included
	Power Supply	Included adapter: 12VDC, 4.0A
<b>Standards</b>	Connector Location / Secured	Side / Yes
	Approvals	CE, FCC, RoHS
<b>Dimensions</b>	Dimensions w/o stand (H/W/D)	17.1 x 14.4 x 2.2 in (434 x 366 x 56mm)
<b>Weight</b>	Monitor Weight	13.2 lbs (6.0kg)