

Addendum


Product Affected: **prox.pad / prox.pad *plus***

Condition: **Outdoor Installations**

When mounting the prox.pad or prox.pad *plus* in a moisture related environment, please be sure to use the provided foam gasket. This will help to keep water from entering the case through the backplate.


To install:

Step 1. Locate the prox.pad (plus) back plate.

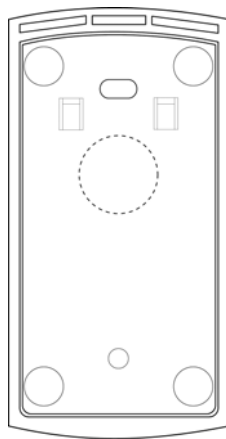

**Prox.pad (plus) backplate
(exterior view)**

Step 2: Locate the provided foam gasket, and remove the paper backing. Adhere the gasket to the exterior of the prox.pad (plus) backplate.

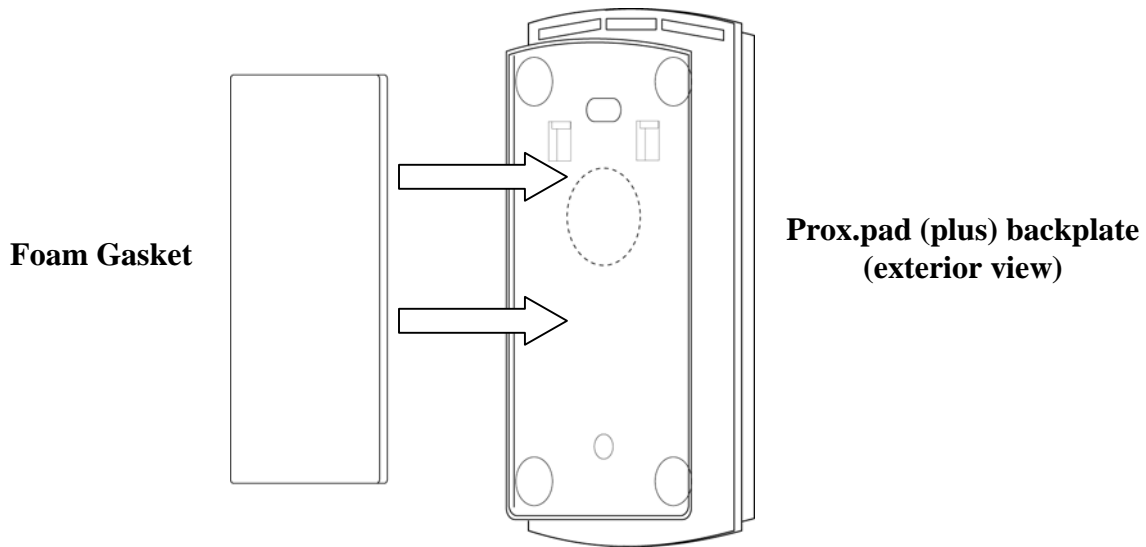

Note: The installation of this gasket is not required for UL compliance