



(760) 438-7000
 USA & Canada (800) 421-1587 & (800) 392-0123
 Toll Free FAX (800) 468-1340
 www.linearcorp.com

TECHNICAL BULLETIN
 TB2007-004
 ISSUE DATE: 6/22/2007


H200 Mounting Bracket Functions as Adapter for DMC-10H Intercom Hub

An easy solution for mounting Linear's M&S Systems brand Model DMC-10H Structured Wire Intercom Hub inside another manufacturer's structured wiring enclosure containing an incompatible mounting grid is to use Linear's OpenHouse brand Model H200 Universal Mounting Bracket as an adapter.


The H200 bracket measures 6-1/2" W x 10-1/4" H and has room for one or two DMC-10H hubs. Also, the H200 bracket is compatible with all OpenHouse and ChannelPlus single-width structured wiring modules.

The H200 bracket can be mounted either horizontally or vertically. To mount the H200 bracket inside the other enclosure, use the bracket as a template and drill pilot holes for the mounting screws. Secure the bracket with two or four 1/2" long, #10 self-tapping sheet metal screws.

With plastic enclosures, use caution when removing or replacing the DMC-10H or other modules, press down firmly on the H200 bracket, so that the screws do not strip out of the plastic enclosure.

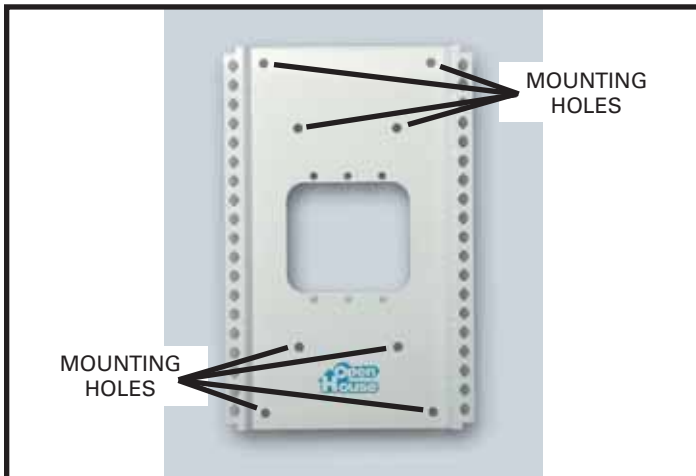

H200 Universal Mounting Bracket and Recommended Mounting Holes

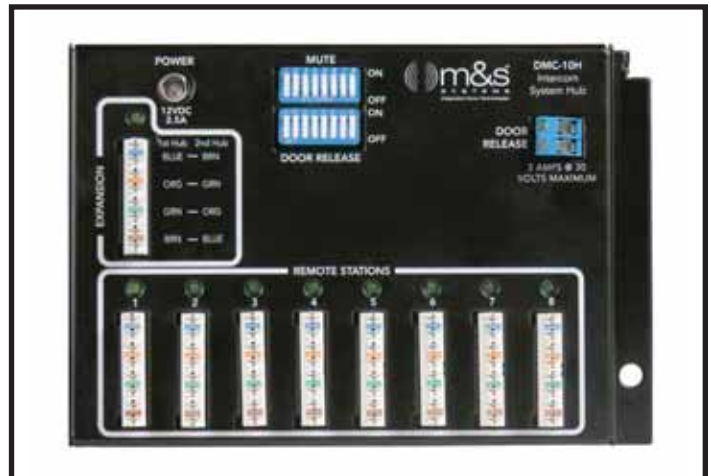

DMC-10H Structured Wire Intercom Hub